

# Temperature Sensor with G1/2" hygienic

## Application / Specified Usage

- Temperature Measurement in vessels and pipes
- Front flush temperature measurement available

## Application Examples

- Monitoring of CIP- / SIP-process
- Measurement in vessels with agitators with front flush version
- Temperature monitoring in milk vessels

## Hygienic Design / Process Connection

- Flow optimized, hygienic and easy sterilizable installation by using Negele weld-in sleeve, e.g. EMZ-132 or build-in system, e.g. EHG-... / 1/2"
- Additional process connections: adapters for Tri-Clamp, dairy flange (DIN 11851), Varivent, DRD, APV et al
- Sealing system free of elastomers, the connection will be without gaps and crevices
- Product contacting materials compliant to FDA
- Sensor completely made of stainless steel resp. PEEK (front flush sensor)
- 3-A verification for front flush version

## Features / Advantages

- Front flush mounting possible
- Integrated transmitter optional
- Different electrical connections available

## Options / Accessories

- 2 x Pt100 (not retrofittable)
- 2 x Pt100 with two transmitters (not retrofittable)
- Programmable transmitters MPU-4 as well as MPU-M with output 4...20 mA, 2-wire
- Integrated transmitters for Profibus PA and HART-protocol
- Programming adapter MPU-P 9701
- Integrated transmitter MPU-LCD with display in connecting head
- Pt100 chip with other classes of accuracy (1/3B, 1/10B)
- Fast response sensor tip 3 mm and 4 mm
- Spacer for high temperature up to 250 °C  
permanent temperature up to 600 °C (on request)
- Pre-assembled connecting cable for M12-plug
- Fixed cable in other lengths and other material available

## Accessories

**PVC-cable with M12-connection made of 1.4305, IP 69 K, unshielded**

<b>M12-PVC / 4-5 m</b>	PVC-cable 4-pin, length 5 m
<b>M12-PVC / 4-10 m</b>	PVC-cable 4-pin, length 10 m
<b>M12-PVC / 4-25 m</b>	PVC-cable 4-pin, length 25 m

## Authorizations



## Temperature Sensor TFP-41



## Temperature Sensor TFP-164 / ... / MPU-M



## PVC-cable with M12-connection




Temperature Sensor		
Process connection	thread	G1/2" combined with Negele weld-in sleeves, build-in systems, adapter sleeves
Tightening torque	sensor sealing PEEK sensor sealing stainless steel	10 Nm 20 Nm
Insertion length EL	TFP-41, -51, -61, -161, -181 TFP-44, -54, -164, -184	20...500 mm front flush
Materials	connecting head thermowell at TFP-44, -54, -164, -184	stainless steel 1.4305 stainless steel 1.4404 PEEK
Operating pressure	TFP-41, -51, -61, -161, -181 TFP-44, -54, -164, -184	50 bar maximum 10 bar maximum
Temperature ranges	ambient sensor tip TFP-xx1 sensor tip TFP-xx4	-50...+80 °C -50...+250 °C -50...+140 °C
Sensing resistor	acc. to DIN EN 60751	Pt100
Electrical connection	cable gland cable connection fixed cable 2,5 m fixed cable 2,5 m (> 90 °C)	M16 x 1,5 M12-plug 1.4305, 4-pins LIYY 4 x 0,25 mm <sup>2</sup> PTFE 4 x 0,14 mm <sup>2</sup>
Protection class		IP 69 K (with electrical connection M12-plug)

Transmitter MPU-4, MPU-10, MPU-H, MPU-M		
Temperature ranges	ambient storage	-40...+85 °C -55...+90 °C
Measuring ranges	MPU-4, MPU-H, MPU-M  MPU-10	standard: -10...40 °C, 0...50 / 100 / 150 / 200 °C special ranges free programmable standard -200...850 °C configuration occurs with Profibus
Accuracy	input	< ±0,25 °C
Temperature drift	zero, span	< 0,01 % / K
Supply	MPU-M, MPU-4 MPU-10 accuracy	8...35 V DC 9...32 V DC 0,01 % / V (reference: 12 V DC)
Output	signal accuracy burden	analog 4...20 mA (not for MPU-10) < ±0,1 % of measurement range < 600 Ω (at U <sub>B</sub> = 24 V)
Humidity	without condensation	0...98 %


Accuracy classes of temperature sensors   Tolerances for Pt100 acc. to DIN EN 60751			
Pt100	A	1/3 B	1/10 B
0 °C / 100 Ω	±0,15 K / ±0,06 Ω	±0,10 K / ±0,04 Ω	±0,03 K / ±0,01 Ω
100 °C / 138,5 Ω	±0,35 K / ±0,13 Ω	±0,27 K / ±0,10 Ω	±0,08 K / ±0,03 Ω

## Electrical connection without transmitter

## With 1 x M12 plug




## Configuration 1st M12 plug



## Electrical connection with transmitter


## With M12 plug




## Configuration M12 plug

- 1: + supply
- 2: - supply 4...20 mA
- 3: not connected
- 4: not connected


## With 2 x M12 plug




## Configuration 2nd M12 plug



## With cable gland




## Configuration strip terminal




clamps for 1st Pt100

clamps for 2nd Pt100  
(at version 2 x Pt100)


## With fixed cable

Fixed cable connection  
with 1 x Pt100

wh ye bn gn standard  
rd rd wh wh PTFE

Fixed cable connection  
with 2 x Pt100 (LIYY)


wh ye bn gn 1st Pt100  
rd bu pk gy 2nd Pt100



Pt100


Fixed cable connection  
with 2 x Pt100 (PTFE)

rd rd wh 1st Pt100  
vt vt ye 2nd Pt100




Pt100

## With cable gland

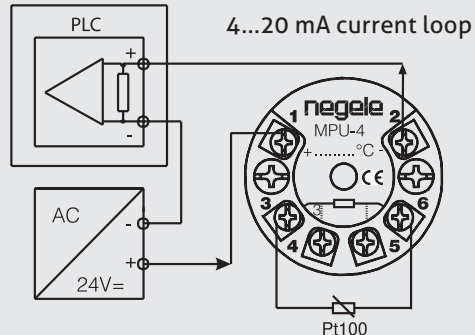

## Electrical connection with two transmitter (TFP-61)


## With 1 x M12-plug (sensor 1 + sensor 2)



## Configuration M12-plug

- 1: + supply (sensor 1)
- 2: - supply 4...20 mA (sensor 1)
- 3: - supply 4...20 mA (sensor 2)
- 4: + supply (sensor 2)


## With 2 x M12-plug (sensor 1)



## Configuration M12-plug

- 1: + supply (sensor 1)
- 2: - supply 4...20 mA (sensor 1)
- 3: not connected
- 4: not connected


## With 2 x M12-plug (sensor 2)




## Configuration M12-plug

- 1: + supply (sensor 2)
- 2: - supply 4...20 mA (sensor 2)
- 3: not connected
- 4: not connected


TFP-41 | TFP-41.2

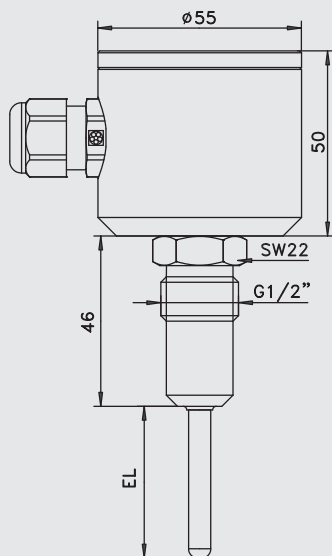

TFP-44

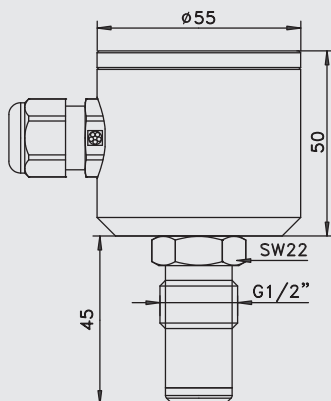

TFP-51

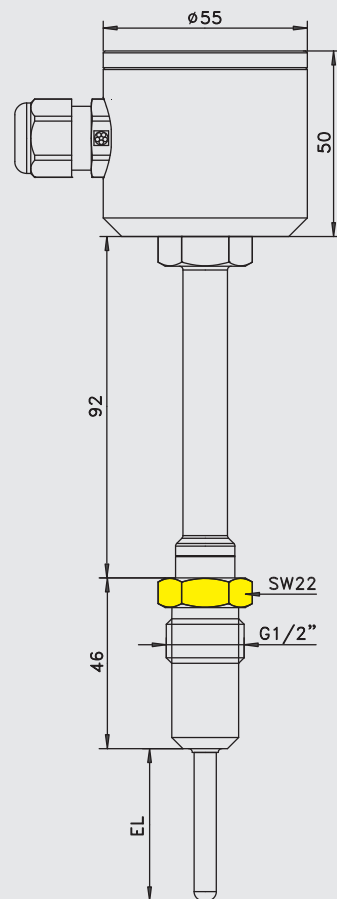


Important advice for TFP-51, -51.2 and TFP-54




Tighten the sensor only at the lower, marked in yellow spanner flat (BE = 22 mm)!


TFP-161

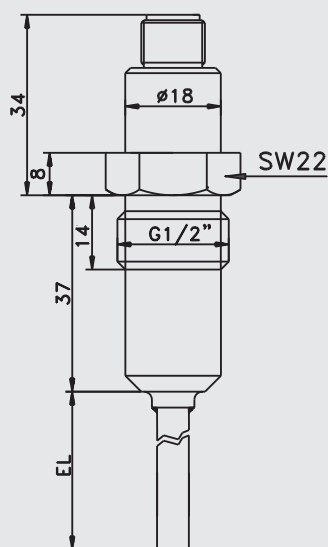


TFP-161 / ... / MPU-M

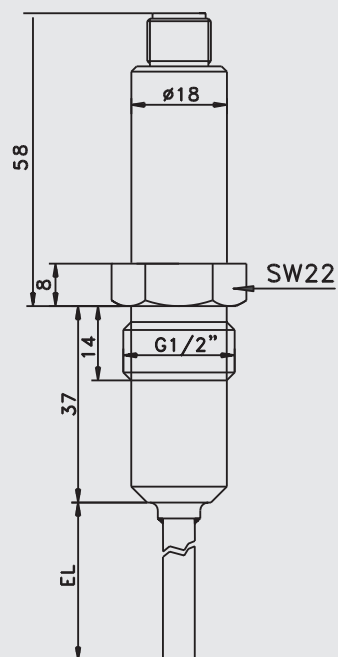


TFP-61

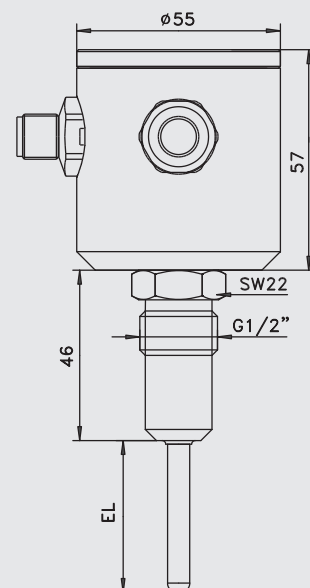


TFP-164

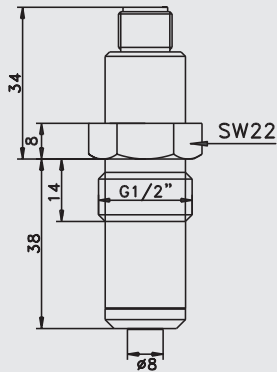


TFP-164 / ... / MPU-M

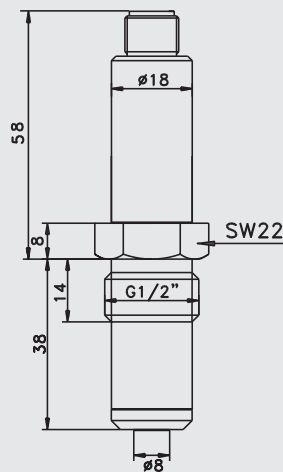

TFP-181 | 181.2

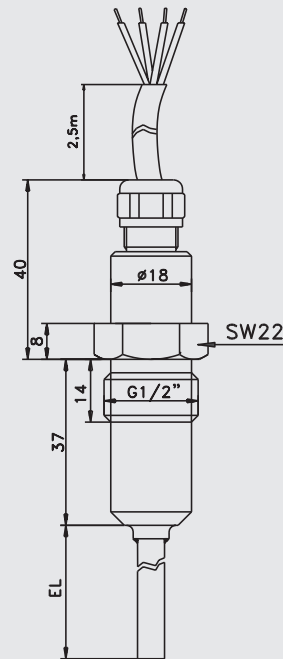

TFP-184

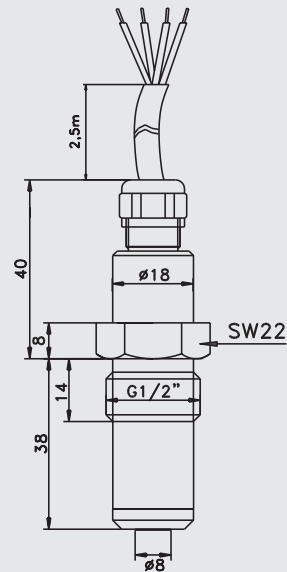


### Sensor tip diameter and response time

All temperature sensors are available with smaller sensor tips, to ensure a shorter response time. The below-mentioned times were measured by emersing a temperature sensor from room temperature into boiling water.


#### Sensor tip Ø 6 mm

Response time:  $t_{50} \leq 3,0 \text{ s}$   
90 %-time:  $t_{90} \leq 8,0 \text{ s}$

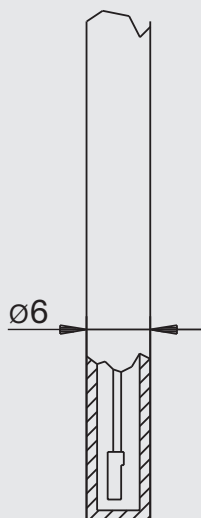


#### Sensor tip Ø 4 mm

Response time:  $t_{50} \leq 2,4 \text{ s}$   
90 %-time:  $t_{90} \leq 6,5 \text{ s}$

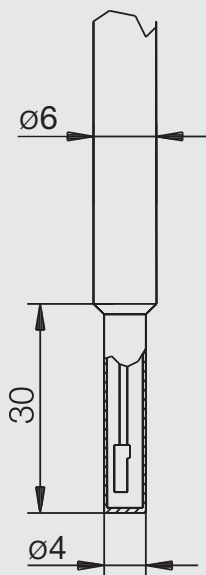


#### Sensor tip Ø 3 mm

Response time:  $t_{50} \leq 0,5 \text{ s}$   
90 %-time:  $t_{90} \leq 1,5 \text{ s}$

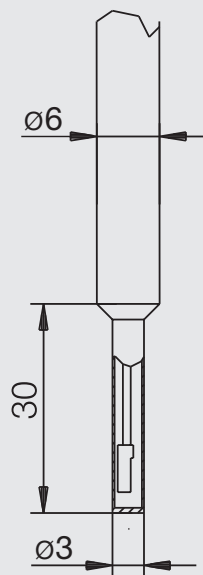

#### Sensor front flush


Response time:  $t_{50} \leq 5,7 \text{ s}$   
90 %-time:  $t_{90} \leq 33,2 \text{ s}$

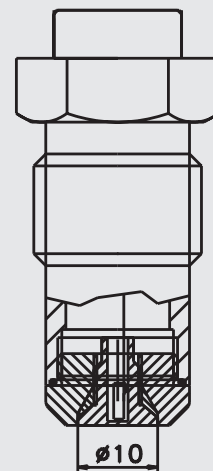

### Conditions for a measuring point according to 3-A-Standard 74-03



- The sensors TFP-44, -54, -164, -184 are approved according to the 3-A-Standard.
- Only with the build-in system **CLEANadapt** (EMZ, EMK, EHG with tube  $\geq$  DN25, ISO 20 and G1", Adapter AMC, AMV, AMA and AMB) allowed.
- The welding seam by using of EMZ and EMK has to correspond with 3-A-Standard 74-03, D6.1.4:  
"The minimum radii for fillets of welds in product contact surfaces shall be not less than 1/4 in. (6.35 mm) except that the minimum radii for such welds may be 1/8 in. (3.18 mm) when the thickness of one or both parts joined is less than 3/16 in. (4.76 mm)."
- Self draining has to be warranted by the build-in position (pos. 1, 2 or 3).



- The process connection needs a self-draining leakage hole.

### Mechanical Connection / Installation



- Use only Negele CLEANadapt system for safe operation of measuring point!

### Conventional Usage



- Not suitable for applications in explosive areas.
- Not suitable for applications in security-relevant equipments (SIL).

### Transport / Storage



- No outdoor storage
- Dry and dust free
- Not exposed to corrosive media
- Protected against solar radiation
- Avoiding mechanical shock and vibration
- Storage temperature -55...+90 °C
- Relative humidity maximum 98 %

### Standards and Guidelines



- You have to comply with applicable regulations and directives.

### Cleaning / Maintenance



- In case of using pressure washers, don't point nozzle directly to electrical connections!

### Advice to EMC



- The device agrees to following standards: EMC directive 2004/108/EC.
- You have to guarantee the EMC directives for the entire equipment.

### Reshipment



- Sensors shall be clean and free of media or heat-conductive paste and must not be contaminated with dangerous media!
- Use suitable transport packaging only to avoid damage of the equipment!

### Disposal



- This instrument is not subject to the WEEE directive 2002/96/EC and the respective national laws.
- Pass the instrument directly on to a specialised recycling company and do not use the municipal collecting points.

## Order code for version with 1 x Pt100

<b>TFP-41</b>	(connecting head Ø 55 mm)
<b>TFP-44</b>	(connecting head Ø 55 mm, front flush)
<b>TFP-51</b>	(connecting head Ø 55 mm, with spacer)
<b>TFP-54</b>	(connecting head Ø 55 mm, with spacer, front flush)
<b>TFP-161</b>	(connecting head Ø 18 mm, electrical connection M12 plug)
<b>TFP-164</b>	(connecting head Ø 18 mm, electrical connection M12 plug, front flush)
<b>TFP-181</b>	(connecting head Ø 18 mm, electrical connection 2,5 m PTFE-cable, other lengths: see accessories, no transmitter possible!)
<b>TFP-184</b>	(connecting head Ø 18 mm, electrical connection 2,5 m PTFE-cable, other lengths: see accessories, front flush, no transmitter possible!)

## Sensor length in mm

<b>020...500</b>	(in steps of 5 mm)
<b>xxx</b>	(special length on request)

## Diameter thermowell in mm (not selectable for TFP-44, -54, -164, -184)

6  
8  
10  
12

## Diameter sensor tip in mm (not selectable for TFP-44, -54, -164, -184)

<b>X</b>	(no reduction)
<b>3</b>	(only for thermowell 6 mm)
<b>4</b>	(only for thermowell 6 mm and 8 mm)
<b>6</b>	(only for thermowell 8 mm and 10 mm)
<b>8</b>	(only for thermowell 12 mm)

## Accuracy class Pt100

A  
1/3B  
1/10B

## Electrical connection

(not selectable for TFP-161, -164, -181, -184)

<b>PG</b>	(cable gland M16x1,5)
<b>M12</b>	(M12 plug, standard with MPU-LCD)

## Transmitter

**X** (without)

only for TFP-41, -44, -51 and -54

<b>MPU-4</b>	(programmable)
<b>MPU-10</b>	(Profibus PA)
<b>MPU-H</b>	(HART-protocol)
<b>MPU-LCD</b>	(with display)

only for TFP-161 and -164

**MPU-M** (programmable)

## Measuring range MPU

(only for types with transmitter; not at MPU-LCD)

<b>-10...40</b>	(range -10...40 °C)
<b>0...50</b>	(range 0...+50 °C)
<b>0...100</b>	(range 0...+100 °C)
<b>0...150</b>	(range 0...+150 °C)
<b>0...200</b>	(range 0...+200 °C)
<b>xx...yy</b>	(special range)

TFP-41 / 100 / 6 / X / A / PG / MPU-4 / 0...100

## Order code for version with 2 x Pt100

- TFP-41.2** (connecting head Ø 55 mm, 2 x Pt100, no transmitter possible!)
- TFP-51.2** (connecting head Ø 55 mm, 2 x Pt100, with spacer, no transmitter possible!)
- TFP-61** (higher connecting head Ø 55 mm, 2 x Pt100, prepared for 2 x transmitter)
- TFP-61-H** (like TFP-61, but with spacer)
- TFP-181.2** (connecting head Ø 18 mm, electrical connection 2,5 m PTFE-cable; other lengths: see at accessories)

## Sensor Length in mm

**020...500** (in steps of 5 mm)

**xxx** (special length)

## Diameter thermowell in mm

**6**

**8**

**10**

**12**

## Diameter sensor tip in mm

**X** (no reduction)

**3** (only with thermowell 6 mm)

**4** (only with thermowell 6 mm and 8 mm)

**6** (only with thermowell 8 mm and 10 mm)

**8** (only with thermowell 12 mm)

## Accuracy class Pt100

**A**

**1/3B**

**1/10B**

## Electrical connection (only for TFP-41.2 and TFP-51.2)

**PG** (cable gland M16x1,5)

**2 x PG** (2 x cable gland M16x1,5)

**2 x M12** (2 x M12-plug)

## Electrical connection (only for TFP-61 and TFP-61-H)

**M12** (M12-plug)

**2 x M12** (2 x M12-plug)

**Continue if TFP-61 oder TFP-61-H is selected!**  
**No further options for TFP-41.2, -51.2, -181.2!**

## 1. Transmitter

**MPU-4** (programmable)

## Measuring Range 1. MPU

**-10...40** (measuring range -10...40 °C)

**0...50** (measuring range 0...+50 °C)

**0...100** (measuring range 0...+100 °C)

**0...150** (measuring range 0...+150 °C)

**0...200** (measuring range 0...+200 °C)

**xx...yy** (special range)

## 2. Transmitter

**MPU-4** (programmable)

## Measuring Range 2. MPU

**-10...40** (-10...40 °C)

**0...50** (0...+50 °C)

**0...100** (0...+100 °C)

**0...150** (0...+150 °C)

**0...200** (0...+200 °C)

**xx...yy** (special)

TFP-61 / 100 / 6 / X / A / M12 / MPU-4 / 0...50 / MPU-4 / 0...50