Sight Flow Indicators (straight line)

with ***flanges connection*** acc. ***DIN PN 16***

Design for horizontal installation

Bauform 111

Application:

Sight Flow Indicators are used for optical control and the observation of filling and current in pipelines.
Without restfluid in the body in horizontal instalation.

Operating conditions:

Working pressure : 16 bar
Working temperature: 150℃ or 280℃

Installation:

Horizontal

Options:

Light-fitting
ANSI-flanges
butt weld ends

Materials:

Body	1.4404 / 1.4571
Covers	Stainless steel
Screws	A4 - 70
Glass	Borosilicate glass acc. to DIN 7080 Soda lime glass acc. to DIN 8902
Gasket	Graphite; (or other materials)

Ordering example:

Sight flow indicators Bauform 111
Body: Stainless steel
Cover: Stainless steel
Glass: Borosilicate glass 16 bar,
DN 50 PN 16

Without rest fluid in the body!

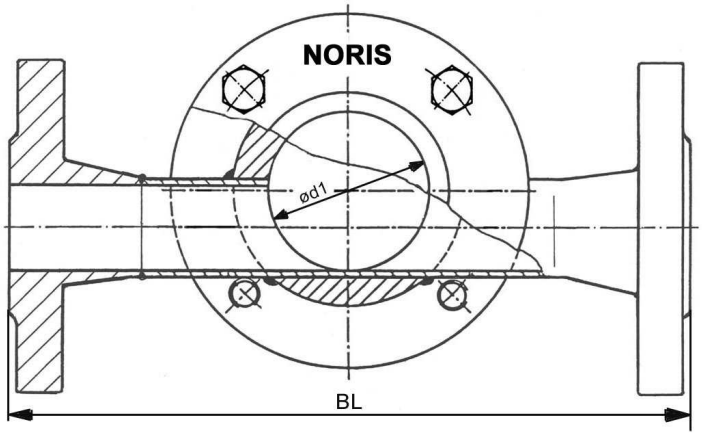

Dimensions:

DN	BL	ø d_1	Glass Ød x S	Screws
15	130	32	45 x 10	M 8
20	150	45	63 x 10	M 8
25	160	45	63 x 10	M 10
32	180	60	80 x 12	M 10
40	200	60	80 x 12	M 10
50	230	80	100 x 15	M 12
65	290	80	100 x 15	M 12
80	310	100	125 x 15	M 12

Further sizes on Bauform 112

Modification reserved

REGOM INSTRUMENTS s.r.o.
Brabcova 1159 / 2
147 00 Praha 4
CZECH REPUBLIC

Tel: +420 241 402 206
Fax: +420 241 400 290
Mail: regom@regom.cz
Skype: regom-office
www.regom.cz