

Sight glass - Tubular type

with **flanged** connection acc. to **DIN**

Application:

Sight glass - Tubular type with flanges on both sides to use in either horizontal or vertical pipe lines for optical control of fluids and gasses.

Operating conditions:

Connection: Flanges PN 10 / 16
Pressure: up to DN 100 - 6 bar max
DN 125 and up – 4 bar max
Temperature: 200°C max.

Installation:

Optional

Special designs:




Protection jacket of acrylic glass
ANSI - Flanges
Extra length

Materials:

Flanges	WN 1.4571	Steel H II
Screws	A4 - 70	Steel
Glass tube	Borosilicate glass	
Gaskets	Viton (PTFE or other materials)	

Ordering example:

Sight Glass - Tubular Type Bauform 20
WN 1.4571, Gaskets Viton
max. 6 bar / 200°C
DN 50, PN 10

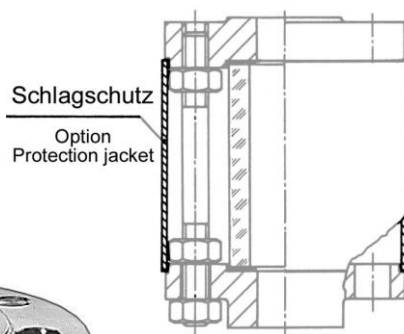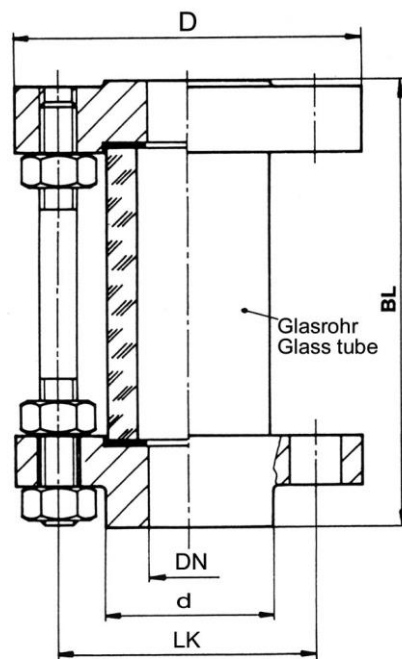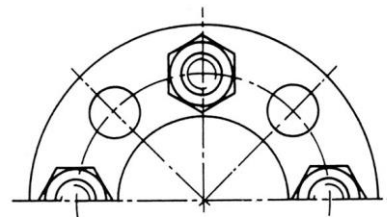

Dimensions:

DN	D	d	BL	Screws	LK
15	95	45	200	4	65
20	105	58	200	4	75
25	115	68	200	4	85
32	140	78	200	4	100
40	150	88	200	4	110
50	165	102	200	4	125
65	185	122	200	4	145
80	200	138	200	4	160
100	220	158	200	4	180
125	250	188	200	8	210
150	285	212	200	8	240
200	340	268	200	8	295

Mounting instructions:

Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.

Modification reserved

REGOM INSTRUMENTS s.r.o.
Brabcova 1159 / 2
147 00 Praha 4
CZECH REPUBLIC

Tel: +420 241 402 206
Fax: +420 241 400 290
Mail: regom@regom.cz
Skype: regom-office
www.regom.cz