

Sight Flow Indicators (straight line) with heating jacket

Application:

To keep cold- or heat- loss at sight flow indicators as low as possible, they are surrounded with a heating jacket. Within the resulting cavity, a corresponding medium can flow to avoid cold- or heat- loss.

Dimension:

Body corresponds Bauform 880
Measures see at Bauform 880
With DIN- and ANSI - Flanges
All dimensions and all pressures

Materials:

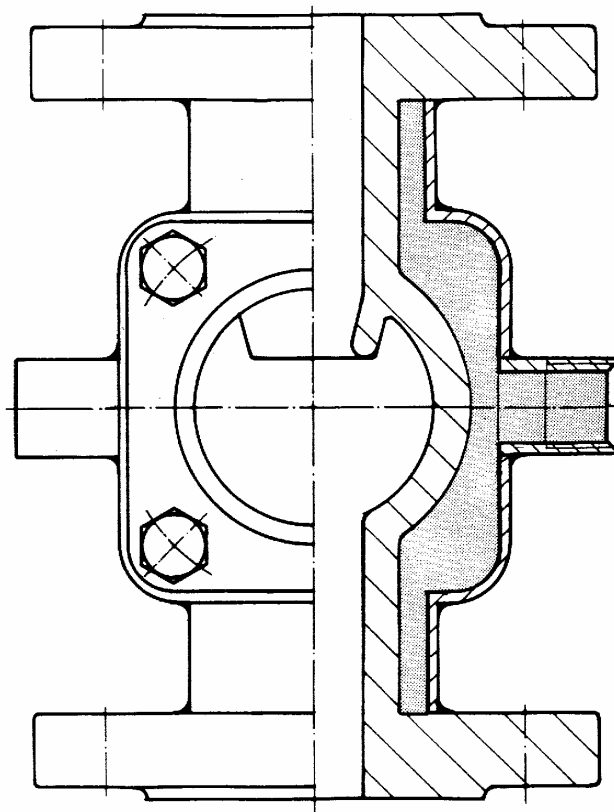
Body:	WN 1.4408
Heating jacket:	WN 1.4571




Connections for heating jacket:

Buttweld ends
Inside or outside thread
Flange connection
Screwing

Standard design:

Inside thread acc. to sketch



Heating jacket connections		
Butt weld ends	Inside or outside thread	Flanged connections
		

Modification reserved

REGOM INSTRUMENTS s.r.o.
Brabcova 1169 / 2
147 00 Praha 4
CZECH REPUBLIC

Tel: +420 241 402 206
Fax: +420 241 400 290
Mail: regom@regom.cz
Skype: regom-office
www.regom.cz