

Slice screen strainer

Application:

Slice screen strainer as intermediate flange construction to use as a starter strainer. Preferably installed for safety in front of measuring instruments, control valves, pumps and sensitive systems.

Only by flange connection applicable

Operating conditions:

Nominal pressure: max. 16 bar

Installation:

Optional; between flanges

Options:


Special mesh sizes

Materials:

Clamping ring	WN 1.4571
Screen	WN 1.4401

Ordering example:

Slice screen strainer, Bauform 146
Stainless steel; mesh size 1,0 mm
DN 50 PN 16

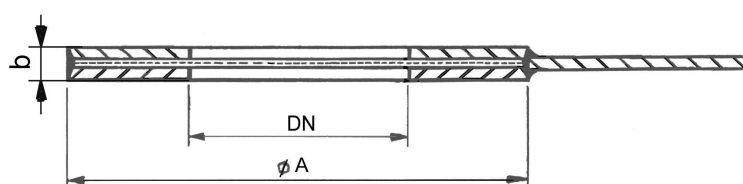

Dimension:

DN	Ø A	b
15	45	7 ±1
20	58	
25	68	
32	78	
40	88	
50	102	
65	122	
80	138	
100	158	
125	188	
150	212	
200	268	
250	320	

Modification reserved

REGOM INSTRUMENTS s.r.o.
Brabcova 1159 / 2
147 00 Praha 4
CZECH REPUBLIC

Tel: +420 241 402 206
Fax: +420 241 400 290
Mail: regom@regom.cz
Skype: regom-office
www.regom.cz