



flow & process solutions





Potravinářský průmysl
Farmaceutický průmysl
Biotechnologie
Petrochemie
Chemický průmysl
Energetika
Úprava vody
Papírenství a zpracování celulózy
Plynárenský průmysl
Keramický průmysl
Zpracovatelský průmysl



Firma s tradicí od r. 1990 se při svém vzniku zaměřila na dodávky základních komponent, přístrojové a měřicí techniky a dodávky technologií pro farmaceutický a potravinářský průmysl. Cílem bylo zajistit kompletní dodavatelsko - inženýrské služby, včetně servisu. V roce 1998, který byl pro firmu velmi významným mezníkem, proběhla transformace společnosti do nynější formy. V dalších letech činnosti společnosti dochází k rozšíření portfolia a je navazována spolupráce s partnery v oblasti armatur, komponent, ventilů, procesní měřicí techniky a čerpadel.

Oblastí působnosti je potravinářský, farmaceutický průmysl, biotechnologie, chemický průmysl, petrochemie, úprava vody, papírenství a celulóza, energetika, keramický průmysl a zpracovatelský průmysl.

Firma REGOM INSTRUMENTS je díky širokému dodavatelskému portfoliu a bohatým zkušenostem schopna zajistit dodávky armatur, komponent, čerpadel, přístrojů a zařízení.

Cílem společnosti REGOM INSTRUMENTS je poskytování kvalitních služeb a spolehlivých dodávek pro co nejširší okruh zákazníků.

Product Information TFP-41, -44, -51, -54, -61, -161, -164, -181, -184

FOOD

Temperature Sensor with G1/2" hygienic



Application/Specified usage

- Temperature Measurement in vessels and pipes
- Front flush temperature measurement available

Application examples

- Monitoring of CIP-/ SIP-process
- Measurement in vessels with agitators with front flush version
- Temperature monitoring in milk vessels

Hygienic design/Process connection

- Flow optimized, hygienic and easy sterilizable installation by using Negele weld-in sleeve, e.g. EMZ-132 or build-in system, e.g. EHG-... / 1/2"
- Additional process connections: adapters for Tri-Clamp, dairy flange (DIN 11851), Varivent, DRD, APV et al
- Sealing system free of elastomers, the connection will be without gaps and crevices
- Product contacting materials compliant to FDA
- Sensor completely made of stainless steel resp. PEEK (front flush sensor)
- Conforming to 3-A Sanitary Standard 74-06 for front flush sensors

Features/Advantages

- Front flush mounting possible
- Integrated transmitter optional
- Different electrical connections available

Options/Accessories

- 2 x Pt100 (not retrofittable)
- 2 x Pt100 with two transmitters (not retrofittable)
- Programmable transmitters MPU-4 as well as MPU-M with output 4...20 mA, 2-wire
- Integrated transmitters for HART-protocol
- Programming adapter MPU-P 9701
- Integrated transmitter MPU-LCD with display in connecting head
- Pt100 chip with other classes of accuracy (1/3B, 1/10B)
- Fast response sensor tip 3 mm and 4 mm
- Spacer for high temperature up to 250 °C
- permanent temperature up to 450 °C (on request)
- Pre-assembled connecting cable for M12 plug
- Fixed cable in other lengths and other material available

Accessories

PVC-cable with M12-connection made of 1.4305, IP 69 K, unshielded

M12-PVC / 4-5 m
M12-PVC / 4-10 m
M12-PVC / 4-25 m

PVC-cable 4-pin, length 5 m
PVC-cable 4-pin, length 10 m
PVC-cable 4-pin, length 25 m


Authorizations



Temperature sensor TFP-164 / ... / MPU-M



Temperature sensor TFP-41

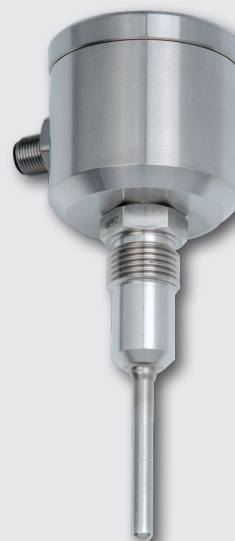

PVC-cable with M12-connection




Temperature sensor		
Process connection	thread	G1/2" combined with Negele weld-in sleeves, build-in systems, adapter sleeves
Tightening torque	sensor sealing PEEK sensor sealing stainless steel	10 Nm 20 Nm
Insertion length EL	TFP-41, -51, -61, -161, -181 TFP-44, -54, -164, -184	20...500 mm front flush
Materials	connecting head thermowell at TFP-44, -54, -164, -184	stainless steel 1.4301 (AISI 304) stainless steel 1.4404 (AISI 316L) PEEK
Operating pressure	TFP-41, -51, -61, -161, -181 TFP-44, -54, -164, -184	50 bar maximum 10 bar maximum
Temperature ranges	ambient sensor tip TFP-xx1 sensor tip TFP-xx4	-50...+80 °C -50...+250 °C -50...+140 °C
Sensing resistor	acc. to DIN EN 60751	Pt100
Electrical connection	cable gland cable connection fixed cable 2.5 m fixed cable 2.5 m (≥ 90 °C)	M16 x 1,5 M12 plug 1.4301 (AISI 304), 4-pins LIYY 4 x 0,25 mm ² PTFE 4 x 0,14 mm ²
Protection class		IP 69 K (with electrical connection M12 plug)

Transmitter MPU-4, MPU-H, MPU-M		
Temperature ranges	ambient storage	-40...+85 °C -55...+90 °C
Measuring ranges	MPU-4, MPU-H, MPU-M	standard: -10...40 °C, 0...50 / 100 / 150 / 200 °C special ranges free programmable
Accuracy	input	< ±0.25 °C
Temperature drift	zero, span	< 0.01 % / K
Supply	MPU-4, MPU-H, MPU-M accuracy	8...35 V DC 0.01 % / V (reference: 12 V DC)
Output	signal accuracy burden	analog 4...20 mA < ±0.1 % of measurement range < 600 Ω (at U _B = 24 V)
Humidity	without condensation	0...98 %


Accuracy classes of temperature sensors Tolerances for Pt100 acc. to DIN EN 60751			
Pt100	A	1/3 B	1/10 B
0 °C / 100 Ω	±0,15 K / ±0,06 Ω	±0,10 K / ±0,04 Ω	±0,03 K / ±0,01 Ω
100 °C / 138,5 Ω	±0,35 K / ±0,13 Ω	±0,27 K / ±0,10 Ω	±0,08 K / ±0,03 Ω

Electrical connection without transmitter


With 1 x M12 plug




Configuration 1st M12 plug




With 2 x M12 plug




Configuration 2nd M12 plug



With cable gland






Configuration strip terminal



clamps for 1st Pt100


clamps for 2nd Pt100
(at version 2 x Pt100)

With fixed cable

Fixed cable connection
with 1 x Pt100wh ye bn gn standard
rd rd wh wh PTFEFixed cable connection
with 2 x Pt100 (LIYY)wh ye bn gn 1st Pt100
rd bu pk gy 2nd Pt100Fixed cable connection
with 2 x Pt100 (PTFE)rd rd wh 1st Pt100
vt vt ye 2nd Pt100

Electrical connection with transmitter


With M12 plug



Configuration M12 plug


1: + supply
2: - supply 4...20 mA
3: not connected
4: not connected

With cable gland

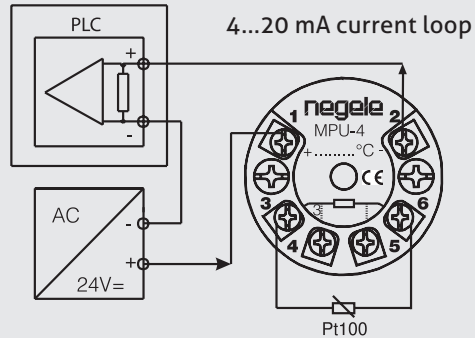

Electrical connection with two transmitter (TFP-61)


With 1 x M12 plug (sensor 1 + sensor 2)



Configuration M12 plug

1: + supply (sensor 1)
2: - supply 4...20 mA (sensor 1)
3: - supply 4...20 mA (sensor 2)
4: + supply (sensor 2)


With 2 x M12 plug (sensor 1)



Configuration M12 plug

1: + supply (sensor 1)
2: - supply 4...20 mA (sensor 1)
3: not connected
4: not connected


With 2 x M12 plug (sensor 2)




Configuration M12 plug

1: + supply (sensor 2)
2: - supply 4...20 mA (sensor 2)
3: not connected
4: not connected


TFP-41 | TFP-41.2

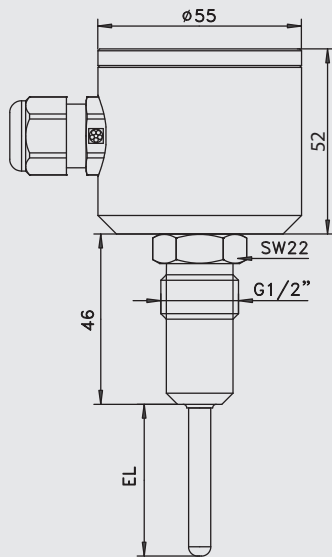

TFP-44

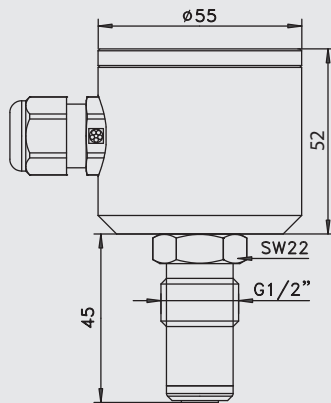


TFP-51 | TFP-51.2

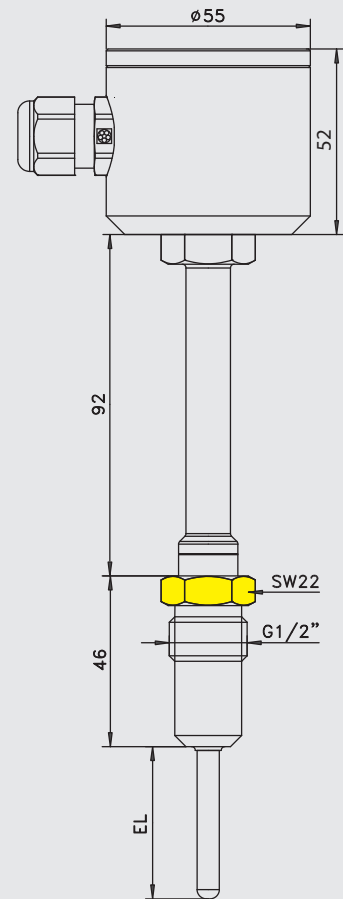
**Important advice for TFP-51, -51.2 and TFP-54**

Tighten the sensor only at the lower, marked in yellow spanner flat (BE = 22 mm)!


TFP-161

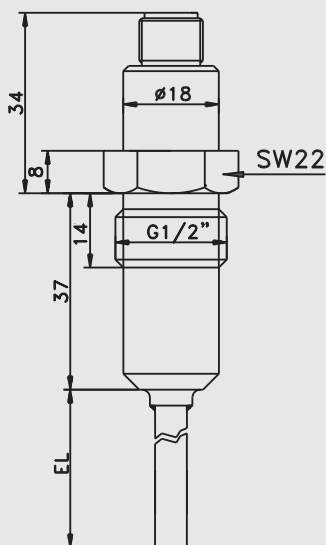


TFP-161 / ... / MPU-M

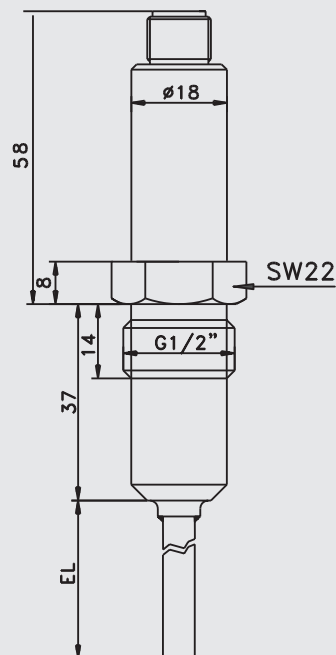


TFP-61

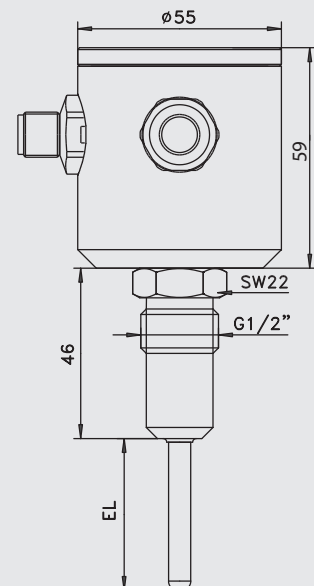

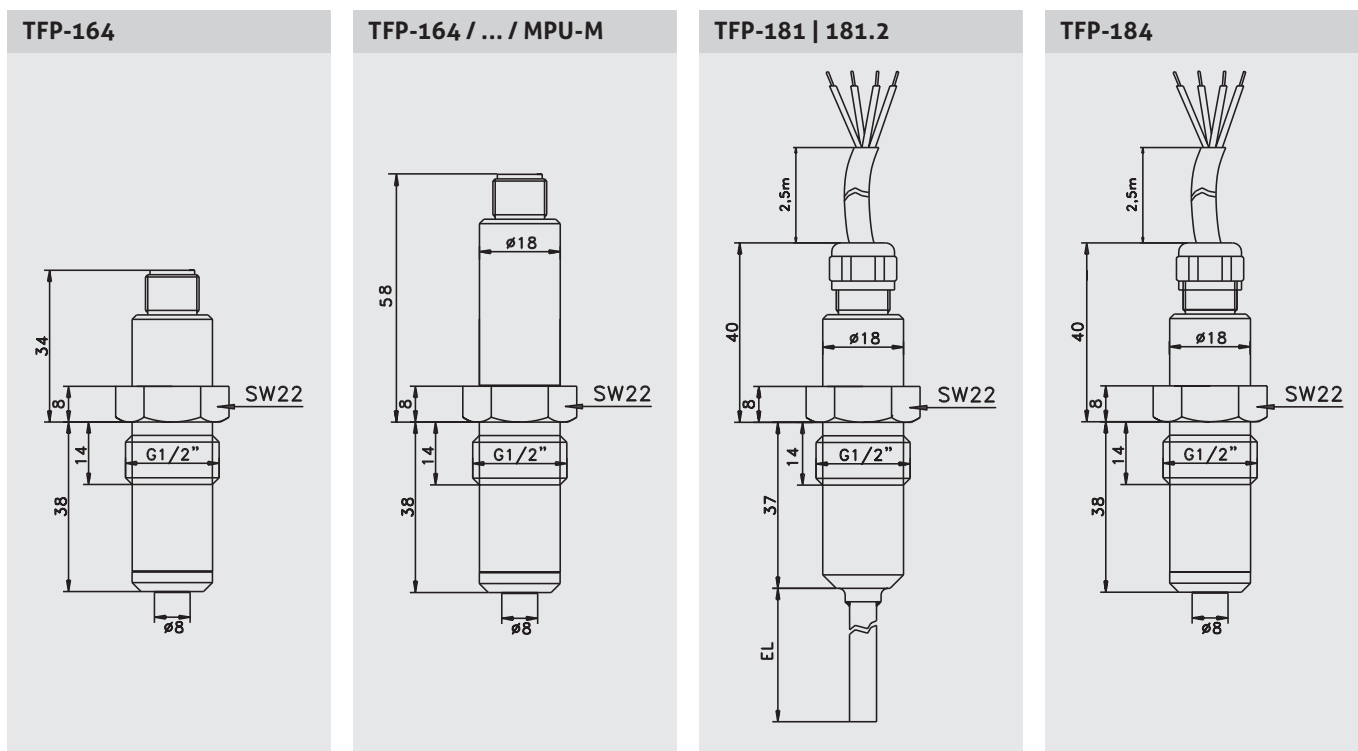

Sensor tip diameter and response time

All temperature sensors are available with smaller sensor tips, to ensure a shorter response time. The below-mentioned times were measured by immersing a temperature sensor from room temperature into boiling water.

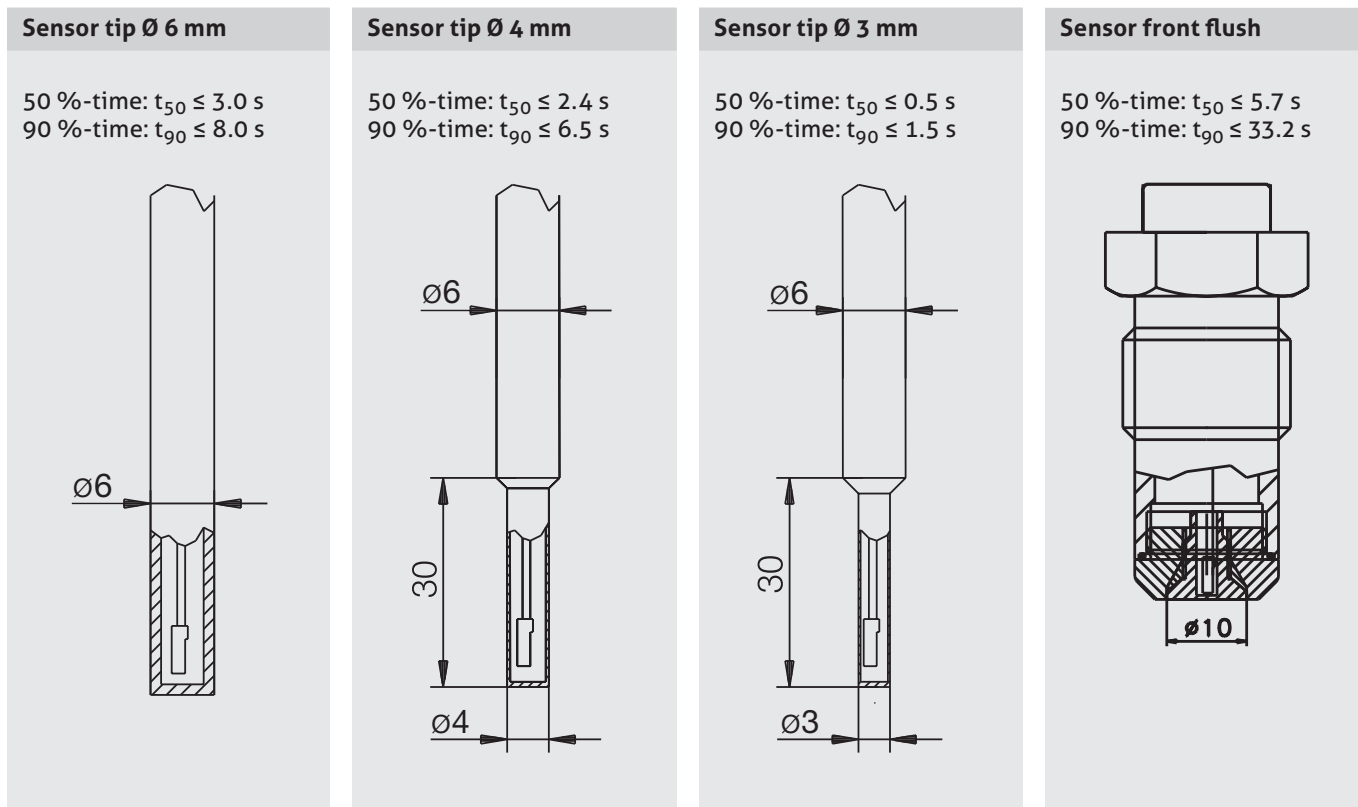

Conditions for a measuring point according to 3-A Sanitary Standard 74-06

- The sensors TFP-44, -54, -164, -184 conforming to the 3-A Sanitary Standard.
- The sensors are designed for CIP-/ SIP-cleaning. Maximum 140 °C / 120 minutes.
- Only with the build-in system CLEANadapt (EMZ, EMK, EHG with tube ≥ DN25, ISO 20 and G1", Adapter AMC and AMV) allowed.
- Using the weld in sleeve EMZ, EMK the weld must comply to the requirements of the current 3-A Sanitary Standard.
- Mounting position, self draining and the position of the leakage hole must be in accordance to current 3-A Sanitary Standard.

Mechanical connection/Installation

- Use only Negele CLEANadapt system for safe operation of measuring point!

Conventional usage

- Not suitable for applications in explosive areas.
- Not suitable for applications in safety-relevant system parts (SIL).

Transport/Storage

- Do not store outside
- Store in an area that is dry and dust-free
- Do not expose to corrosive media
- Protect against solar radiation
- Avoid mechanical shock and vibration
- Storage temperature -55...+90 °C
- Relative humidity max. 98%

Standards and guidelines

- Compliance with the applicable regulations and directives is mandatory.

Cleaning/Maintenance

- When using a pressure washer, do not point the nozzle directly at the electrical connections.

Note on CE

- Applicable directives:
Electromagnetic Compatibility Directive 2014/30/EU
- Compliance with the applicable EU directives is identified by the CE label on the product.
- The operating company is responsible for complying with the guidelines applicable to the entire installation.

Reshipment

- Sensors shall be clean and free of media or heat-conductive paste and must not be contaminated with dangerous media!
- Use suitable transport packaging only to avoid damage of the equipment!

Disposal

- Electrical devices should not be disposed of with household trash. They must be recycled in accordance with national laws and regulations.
- Take the device directly to a specialized recycling company and do not use municipal collection points.

Order code for version with 1 x Pt100

TFP-41	(connecting head Ø 55 mm)
TFP-44	(connecting head Ø 55 mm, front flush)
TFP-51	(connecting head Ø 55 mm, with spacer)
TFP-54	(connecting head Ø 55 mm, with spacer, front flush)
TFP-161	(connecting head Ø 18 mm, electrical connection M12 plug)
TFP-164	(connecting head Ø 18 mm, electrical connection M12 plug, front flush)
TFP-181	(connecting head Ø 18 mm, electrical connection 2.5 m PTFE-cable, other lengths: see accessories, no transmitter possible!)
TFP-184	(connecting head Ø 18 mm, electrical connection 2.5 m PTFE-cable, other lengths: see accessories, front flush, no transmitter possible!)

Sensor length in mm

020...500	(in steps of 5 mm)
xxx	(special length on request)

Diameter thermowell in mm (not selectable for TFP-44, -54, -164, -184)

6
8
10
12

Diameter sensor tip in mm (not selectable for TFP-44, -54, -164, -184)

X	(no reduction)
3	(only for thermowell 6 mm)
4	(only for thermowell 6 mm and 8 mm)
6	(only for thermowell 8 mm and 10 mm)
8	(only for thermowell 12 mm)

Accuracy class Pt100

A
1/3B
1/10B

Electrical connection

(not selectable for TFP-161, -164, -181, -184)

PG	(cable gland M16x1.5)
M12	(M12 plug, standard with MPU-LCD)

Transmitter

X (without)

only for TFP-41, -44, -51 and -54

MPU-4	(programmable)
MPU-H	(HART-protocol)
MPU-LCD	(with display)

only for TFP-161 and -164

MPU-M (programmable)

Measuring range MPU

(only for types with transmitter; not at MPU-LCD)

-10...40	(range -10...40 °C)
0...50	(range 0...+50 °C)
0...100	(range 0...+100 °C)
0...150	(range 0...+150 °C)
0...200	(range 0...+200 °C)
xx...yy	(special range)

TFP-41 / 100 / 6 / X / A / PG / MPU-4 / 0...100

Order code for version with 2 x Pt100

TFP-41.2	(connecting head Ø 55 mm, 2 x Pt100, no transmitter possible!)
TFP-51.2	(connecting head Ø 55 mm, 2 x Pt100, with spacer, no transmitter possible!)
TFP-61	(higher connecting head Ø 55 mm, 2 x Pt100, prepared for 2 x transmitter)
TFP-61-H	(like TFP-61, but with spacer)
TFP-181.2	(connecting head Ø 18 mm, electrical connection 2.5 m PTFE-cable; other lengths: see at accessories)

Sensor Length in mm

020...500 (in steps of 5 mm)
xxx (special length)

Diameter thermowell in mm

6
8
10
12

Diameter sensor tip in mm

X (no reduction)
3 (only with thermowell 6 mm)
4 (only with thermowell 6 mm and 8 mm)
6 (only with thermowell 8 mm and 10 mm)
8 (only with thermowell 12 mm)

Accuracy class Pt100

A
1/3B
1/10B

Electrical connection (only for TFP-41.2 and TFP-51.2)

PG (cable gland M16x1.5)
2PG (2 x cable gland M16x1.5)
2M12 (2 x M12 plug)

Electrical connection (only for TFP-61 and TFP-61-H)

M12 (M12 plug)
2M12 (2 x M12 plug)

Continue if TFP-61 oder TFP-61-H is selected!
No further options for TFP-41.2, -51.2, -181.2!

1. Transmitter

MPU-4 (programmable)

Measuring range 1. MPU

-10...40 (measuring range -10...40 °C)
0...50 (measuring range 0...+50 °C)
0...100 (measuring range 0...+100 °C)
0...150 (measuring range 0...+150 °C)
0...200 (measuring range 0...+200 °C)
xx...yy (special range)

2. Transmitter

MPU-4 (programmable)

Measuring range 2. MPU

-10...40 (-10...40 °C)
0...50 (0...+50 °C)
0...100 (0...+100 °C)
0...150 (0...+150 °C)
0...200 (0...+200 °C)
xx...yy (special)

TFP-61 / 100 / 6 / X / A / M12 / MPU-4 / 0...50 / MPU-4 / 0...50



Copyright© 2008 REGOM INSTRUMENTS s.r.o.

Bez souhlasu REGOM INSTRUMENTS s.r.o. není dovoleno texty či obrazové materiály modifikovat, kopírovat, distribuovat, přenášet, zobrazovat, reprodukovat, publikovat, nebo pomocí nich vytvářet pozměněné materiály.

www.regom.com