



flow & process solutions





Potravinářský průmysl
Farmaceutický průmysl
Biotechnologie
Petrochemie
Chemický průmysl
Energetika
Úprava vody
Papírenství a zpracování celulózy
Plynárenský průmysl
Keramický průmysl
Zpracovatelský průmysl



Firma s tradicí od r. 1990 se při svém vzniku zaměřila na dodávky základních komponent, přístrojové a měřicí techniky a dodávky technologií pro farmaceutický a potravinářský průmysl. Cílem bylo zajistit kompletní dodavatelsko - inženýrské služby, včetně servisu. V roce 1998, který byl pro firmu velmi významným mezníkem, proběhla transformace společnosti do nynější formy. V dalších letech činnosti společnosti dochází k rozšíření portfolia a je navazována spolupráce s partnery v oblasti armatur, komponent, ventilů, procesní měřicí techniky a čerpadel.

Oblastí působnosti je potravinářský, farmaceutický průmysl, biotechnologie, chemický průmysl, petrochemie, úprava vody, papírenství a celulóza, energetika, keramický průmysl a zpracovatelský průmysl.

Firma REGOM INSTRUMENTS je díky širokému dodavatelskému portfoliu a bohatým zkušenostem schopna zajistit dodávky armatur, komponent, čerpadel, přístrojů a zařízení.

Cílem společnosti REGOM INSTRUMENTS je poskytování kvalitních služeb a spolehlivých dodávek pro co nejširší okruh zákazníků.

Product Information TFP-42P, -52P, -62P, -162P, -182P

PHARMA

Pharma-Temperature Sensor M12 hygienic



Application/Specified usage

- Temperature measurement in pipes DN15...DN80
- Temperature measurement in thin-walled pipes and vessels

Application examples

- Process monitoring
- Monitoring of CIP-/SIP-process
- Temperature measurement in hot steam pipes

Hygienic design/Process connection

- Hygienic process connection with CLEANadapt
- All wetted materials are FDA-conform
- Sensor completely made of stainless steel
- Complete overview of process connections: see product information CLEANadapt
- The Anderson-Negele CLEANadapt system offers a flow-optimized, hygienic and easily sterilizable installation solution for sensors.

Features/Advantages

- CIP-/SIP-cleaning up to 140 °C
- Short reaction time, very compact measurement point
- Material 1.4435, inspection certificate 3.1 included in delivery (for product contacting components)
- Sensor e-polished $R_a \leq 0,8 \mu m$ (on request)
- Integrated transmitter (optional)
- Different electrical connections available
- $R_a \leq 0,4 \mu m$ or $0,6 \mu m$ (on request)

Options/Accessories

- 2 x Pt100 (not retrofittable)
- 2 x Pt100 with two transmitters (not retrofittable)
- Programmable transmitters MPU-4 and MPU-M with output 4...20 mA, 2-wire
- Integrated transmitters for HART-protocol
- Programming adapter MPU-P 9701
- Integrated transmitter MPU-LCD with display in connecting head
- Pt100 chip with other classes of accuracy (1/3B, 1/10B)
- Material certificate according to EN10204-3.1 for build-in systems, e.g. EHG
- Spacer for permanent temperatures up to 250 °C
- Resistance on permanent temperature up to 450 °C (on request)
- Pre-assembled connecting cable for M12 plug
- Fixed cable in other lengths and other material available
- Calibration certificate (optional with order)

Authorizations



Temperature sensor TFP-42P



Temperature sensor TFP-162P with transmitter MPU-M




Temperature sensor		
Process connection	thread	M12 CLEANadapt; combined with Negele weld-in sleeves, build-in-systems, adapter sleeves
Tightening torque		10 Nm
Insertion length	standard	17 mm (special length up to 40 mm possible)
Materials	connecting head thermowell	stainless steel 1.4301 (AISI 304) stainless steel 1.4435 (AISI 316L)
Operating pressure		50 bar maximum
Temperature ranges	ambient sensor tip	-50...+80 °C -50...+250 °C
Sensing resistor	acc. to DIN EN 60751	Pt100
Electrical connection	cable gland cable connection fixed cable 2.5 m fixed cable 2.5 m (≥ 90 °C)	M16 x 1.5 M12 plug 1.4301 (AISI 304), 4-pins LIYY 4 x 0.25 mm ² PTFE 4 x 0.14 mm ²
Protection class		IP 69 K (with electrical connection M12 plug)

Transmitter MPU-4, MPU-H, MPU-M		
Temperature ranges	ambient storage	-40...+85 °C -55...+90 °C
Measuring ranges	MPU-4, MPU-H, MPU-M	standard: -10...40 °C, 0...50 / 100 / 150 / 200 °C special ranges free programmable
Accuracy	input	< ± 0.25 °C
Temperature drift	zero, span	< 0.01 % / K
Supply	MPU-4, MPU-H, MPU-M accuracy	8...35 V DC 0.01 % / V (reference: 12 V DC)
Output	signal accuracy burden	analog 4...20 mA < ± 0.1 % of measurement range < 600 Ω (at $U_B = 24$ V)
Humidity	without condensation	0...98 %


Accuracy classes of temperature sensors Tolerances for Pt100 acc. to DIN EN 60751			
Pt100	A	1/3 B	1/10 B
0 °C / 100 Ω	$\pm 0,15$ K / $\pm 0,06$ Ω	$\pm 0,10$ K / $\pm 0,04$ Ω	$\pm 0,03$ K / $\pm 0,01$ Ω
100 °C / 138,5 Ω	$\pm 0,35$ K / $\pm 0,13$ Ω	$\pm 0,27$ K / $\pm 0,10$ Ω	$\pm 0,08$ K / $\pm 0,03$ Ω

Electrical connection without transmitter

With 1 x M12 plug




Configuration 1st M12 plug



Electrical connection with transmitter


With M12 plug




Configuration M12 plug

- 1: + supply
- 2: - supply 4...20 mA
- 3: not connected
- 4: not connected


With 2 x M12 plug




Configuration 2nd M12 plug




With cable gland

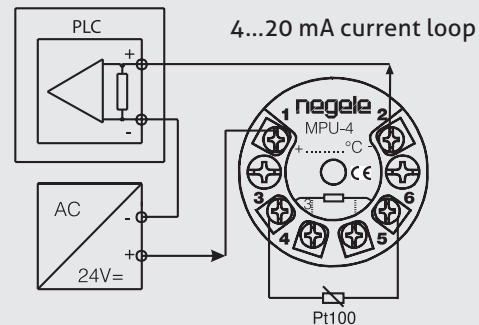

With cable gland



Configuration strip terminal




clamps for 1st Pt100

clamps for 2nd Pt100
(at version 2 x Pt100)

Electrical connection with two transmitter (TFP-62P)

With 1 x M12 plug (sensor 1 + sensor 2)



Configuration M12 plug


- 1: + supply (sensor 1)
- 2: - supply 4...20 mA (sensor 1)
- 3: - supply 4...20 mA (sensor 2)
- 4: + supply (sensor 2)

With fixed cable




Fixed cable connection with 1 x Pt100

wh ye bn gn standard
rd rd wh wh PTFE




Fixed cable connection with 2 x Pt100 (LIYY)

wh ye bn gn 1st Pt100
rd bu pk gy 2nd Pt100




Fixed cable connection with 2 x Pt100 (PTFE)

rd rd wh 1st Pt100
vt vt ye 2nd Pt100




With 2 x M12 plug (sensor 1)



Configuration M12 plug

- 1: + supply (sensor 1)
- 2: - supply 4...20 mA (sensor 1)
- 3: not connected
- 4: not connected


With 2 x M12 plug (sensor 2)




Configuration M12 plug

- 1: + supply (sensor 2)
- 2: - supply 4...20 mA (sensor 2)
- 3: not connected
- 4: not connected


TFP-42P | TFP-42P.2

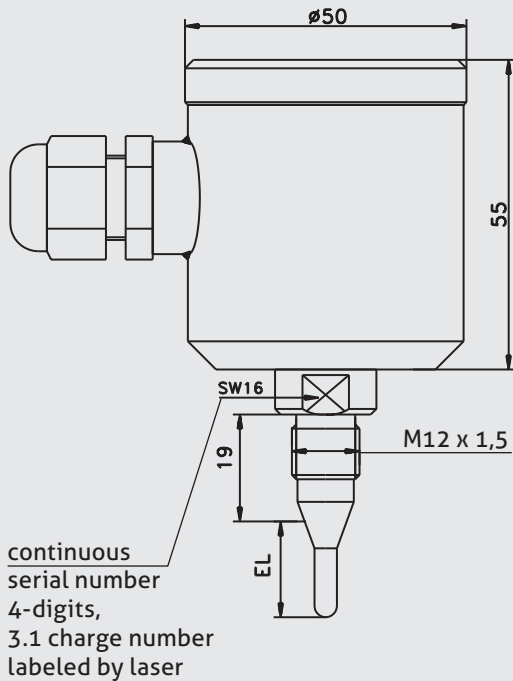

TFP-52P | TFP-52P.2

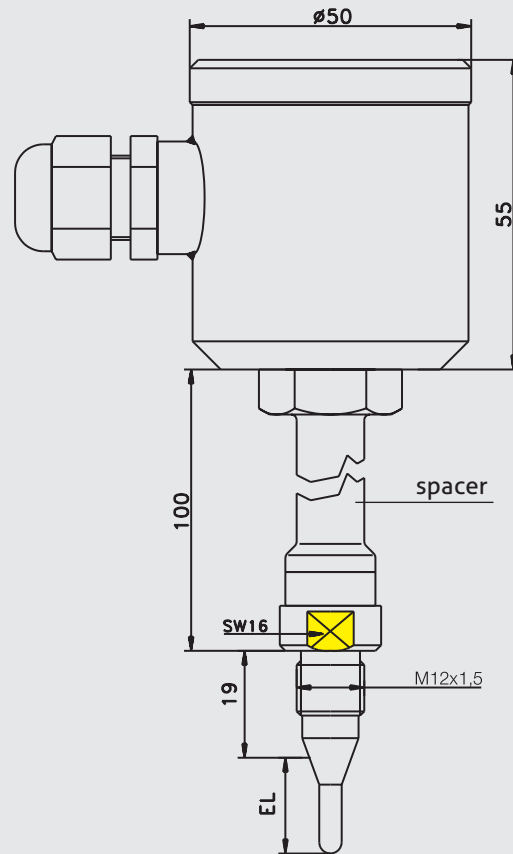


TFP-62P / ... / 2 x M12

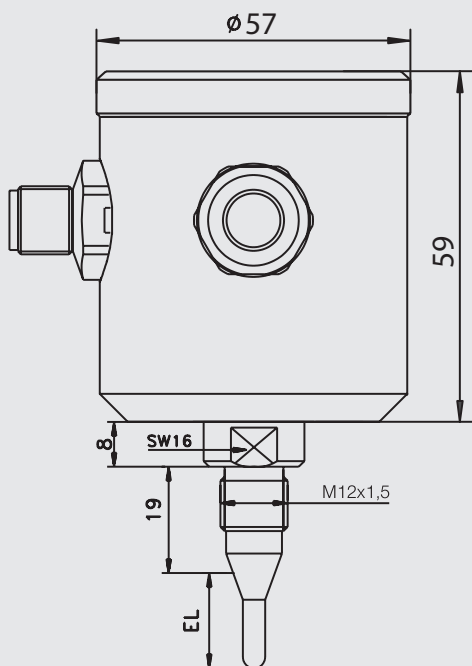
**Important installation advice**

Tighten the sensor only at the lower spanner flat (WW16)!


TFP-162P

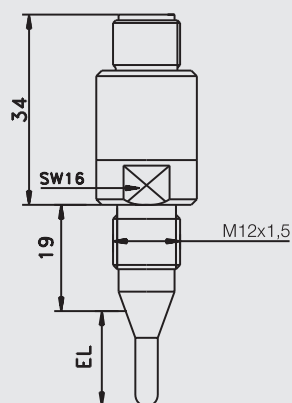

TFP-162P / ... / MPU-M

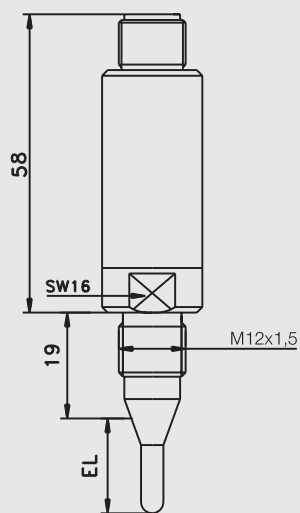

TFP-182P

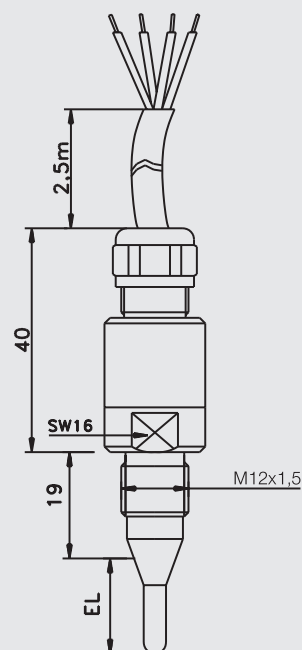


Sensor tip diameter and response time

The below-mentioned times were measured by emerging a temperature sensor from room temperature into boiling water.

Sensor tip Ø 4 mm

50 %-time: $t_{50} \leq 2,4 \text{ s}$

90 %-time: $t_{90} \leq 6,5 \text{ s}$

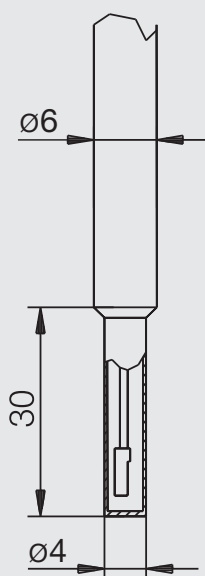

Mechanical Connection / Installation

- Use only Negele CLEANadapt system for safe operation of measuring point!

Conventional Usage

- Not suitable for applications in explosive areas.
- Not suitable for applications in security-relevant equipments (SIL).

Transport / Storage

- No outdoor storage
- Dry and dust free
- Not exposed to corrosive media
- Protected against solar radiation
- Avoiding mechanical shock and vibration
- Storage temperature -55...+90 °C
- Relative humidity maximum 98 %

Reshipment

- Sensors shall be clean and free of media or heat-conductive paste and must not be contaminated with dangerous media!
- Use suitable transport packaging only to avoid damage of the equipment!

Cleaning / Maintenance

- In case of using pressure washers, don't point nozzle directly to electrical connections!

Standards and Guidelines

- You have to comply with applicable regulations and directives.

Disposal

- Electrical devices should not be disposed of with household trash. They must be recycled in accordance with national laws and regulations.
- Take the device directly to a specialized recycling company and do not use municipal collection points.

Note on CE

- Applicable directives:
Electromagnetic Compatibility Directive 2014/30/EU
- Compliance with the applicable EU directives is identified by the CE label on the product.
- The operating company is responsible for complying with the guidelines applicable to the entire installation.

Temperature Transmitter MPU-LCD with Display

Application / Specified Usage

- 4...20mA transmitter with LCD for Pt100 temperature sensor
- For installation in temperature sensor
- Sensor monitoring

Features

- 4-digit display with green backlight
- Temperature measurement in °C and °F
- Easy range select by one button
- Lower costs for wiring because of 2-wire technology

Note

See product information „MPU-LCD“ for details.

**Option MPU-LCD
(display in the connection head)**

Order code for version with 1 x Pt100; inclusive 3.1 certificate

TFP-42P	(sensor with connecting head Ø 50 mm, non-sensitive design to vibrations)					
TFP-52P	sensor with connecting head Ø 50 mm, non-sensitive design to vibrations, with spacer)					
TFP-162P	(sensor with connecting head Ø 18 mm, electrical connection M12 plug)					
TFP-182P	(sensor with connecting head Ø 18 mm, electrical connection 2,5 m PTFE-cable, other lengths: see at accessories)					
Sensor length EL in mm						
017						
xxx	special length (up to 40 mm maximal)					
Diameter sensor tip in mm						
4						
6	(on request)					
Accuracy class Pt100						
A						
1/3B						
1/10B						
Electrical connection (not selectable at TFP-162P and -182P)						
PG	(cable gland M16x1,5)					
M12	(M12 plug, standard with MPU-LCD)					
Transmitter						
X	(without)					
for TFP-42P and -52P						
MPU-4	(programmable)					
MPU-H	(HART-protocol)					
MPU-LCD	(with display)					
only for TFP-162P						
MPU-M	(programmable)					
Measuring range MPU (only for types with transmitter; not for MPU-LCD)						
-10...40	(measurement range -10...40 °C)					
0...50	(measurement range 0...50 °C)					
0...100	(measurement range 0...100 °C)					
0...150	(measurement range 0...150 °C)					
0...200	(measurement range 0...200 °C)					
xx...yy	(special range)					
TFP-42P /	017 /	6 /	A /	PG /	MPU-4 /	0...100

Accessories

PVC-cable with M12-connection made of 1.4305, IP 69 K, unshielded

M12-PVC / 4-5 m	PVC-cable 4-pin, length 5 m
M12-PVC / 4-10 m	PVC-cable 4-pin, length 10 m
M12-PVC / 4-25 m	PVC-cable 4-pin, length 25 m

PVC-cable with M12-connection, brass nickel-plated, IP 67, shielded

M12-PVC / 4G-5 m	PVC-cable 4-pin, length 5 m
M12-PVC / 4G-10 m	PVC-cable 4-pin, length 10 m
M12-PVC / 4G-25 m	PVC-cable 4-pin, length 25 m

Programming adapter MPU-P 9701

Programming adapter for
MPU-4, MPU-H and MPU-M

PVC-cable with M12-connection



Programming adapter MPU-P 9701



Order code for version with 2 x Pt100; inclusive 3.1 certificate

TFP-42P.2	(connecting head Ø 50 mm, 2 x Pt100, non-sensitive design to vibrations)
TFP-52P.2	(connecting head Ø 50 mm, 2 x Pt100, non-sensitive design to vibrations, with spacer)
TFP-62P	(higher connecting head Ø 57 mm, 2 x Pt100, prepared for 2 x transmitter)
TFP-62P-H	(like TFP-62P, but with spacer)
TFP-182P.2	(connecting head Ø 18 mm, electrical connection 2,5 m PTFE-cable; other lengths: see at accessories)

Sensor length EL in mm

017

xxx special length (up to 40 mm maximal)

Diameter sensor tip in mm

4

6 (on request)

Accuracy class Pt100

A

1/3B

1/10B

Electrical connection only for TFP-42P.2 and TFP-52P.2

PG (cable gland M16x1,5)

2PG (2 x cable gland M16x1,5)

2M12 (2 x M12 plug)

Electrical connection only for TFP-62P and TFP-62P-H

M12 (M12 plug)

2M12 (2 x M12 plug)

Continue if TFP-62P or TFP-62P-H is selected!

No further options for TFP-42P.2, -52P.2 and -182P.2!

1st Transmitter

MPU-4 (programmable)

Measuring range 1st transmitter

-10...40 (measurement range -10...40 °C)

0...50 (measurement range 0...+50 °C)

0...100 (measurement range 0...+100 °C)

0...150 (measurement range 0...+150 °C)

0...200 (measurement range 0...+200 °C)

xx...yy (special range)

2nd Transmitter

MPU-4 (programmable)

Measuring range 2nd transmitter

-10...40 (range -10...40 °C)

0...50 (range 0...+50 °C)

0...100 (range 0...+100 °C)

0...150 (range 0...+150 °C)

0...200 (range 0...+200 °C)

xx...yy (special range)

TFP-62P / 017 / 4 / A / M12 / MPU-4 / 0...50 / MPU-4 / 0...50



Copyright© 2008 REGOM INSTRUMENTS s.r.o.

Bez souhlasu REGOM INSTRUMENTS s.r.o. není dovoleno texty či obrazové materiály modifikovat, kopírovat, distribuovat, přenášet, zobrazovat, reprodukovat, publikovat, nebo pomocí nich vytvářet pozměněné materiály.

www.regom.com